


TASCARLEYRAFTS

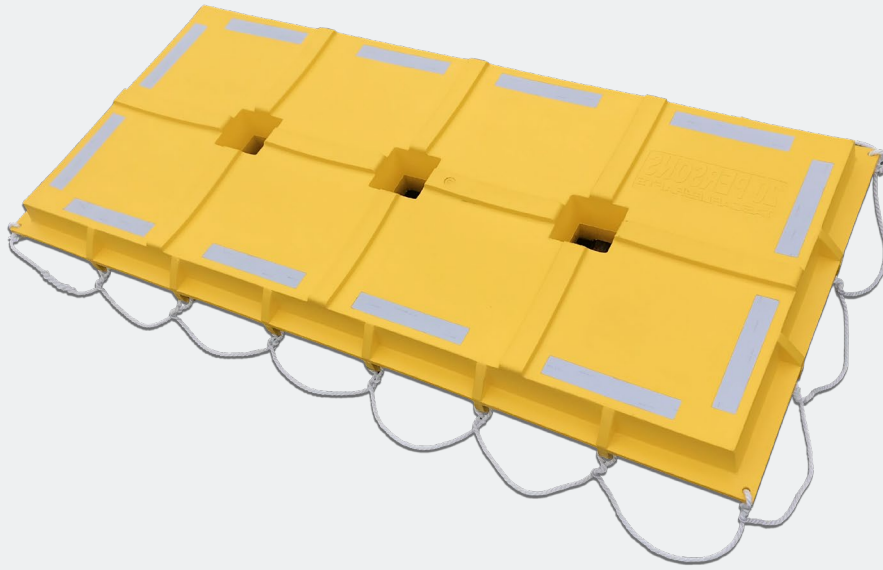

The Tas Carley Raft has been rotationally moulded from high visibility, fire retardant LDPE with UV stabilisation, and a 2-part urethane core. The raft can accommodate 20 people, each holding a rope handle around the perimeter. Manufactured to NSCV requirements and mounted in a float free position on the boat/ship, the Tas Carley Raft forms part of safety compliance requirements for commercial vessels. The LLDPE fire retardant resin used for the outer casing is itself positively buoyant and the closed cell polyurethane completes the buoyancy requirements.

FEATURES

- Through cavities (3) provide additional strength and drainage.
- Raised ribs mate with recesses on top to lock in when flat stacking.
- Total weight of approximately 35kg, ensures easy deploying by 2 persons.
- Recessed reflective tape positions ensure the tape will not rub on opposing surfaces.
- High quality LLDPE is engineered with the flame retardant, ensuring consistency and integrity of construction.
- Ecofoam GP330 polyurethane fire-retardant core. This product contains no CFC's or HCFC's and is environmentally friendly foam that has no ozone depleting potential.

WIDTH	LENGTH	THICKNESS	WEIGHT
1000mm	2140mm	195mm	35kg approx. (25kg moulded weight, 10kg urethane)

TASMANIAN SHIPPING SUPPLIES
AUSTRALIA

03 6235 7100 | tasshipping@fader.com.au | www.tasshipping.com.au

Port Tower Building, 18 Hunter Street, Hobart TAS 7000